

به نام خدا



مودم وایرلس


راهنمای نصب و راه اندازی سرویس ADSL 2+

مشترک گرامی سلام

در صورت بروز مشکل در طی مراحل نصب لطفاً همکاران ما را در قسمت پشتیبانی در جریان بگذارید.

شماره تماس پشتیبانی 24 ساعته: 23030-داخلی 4

با تشکر
پژواک ارتباط نواندیش

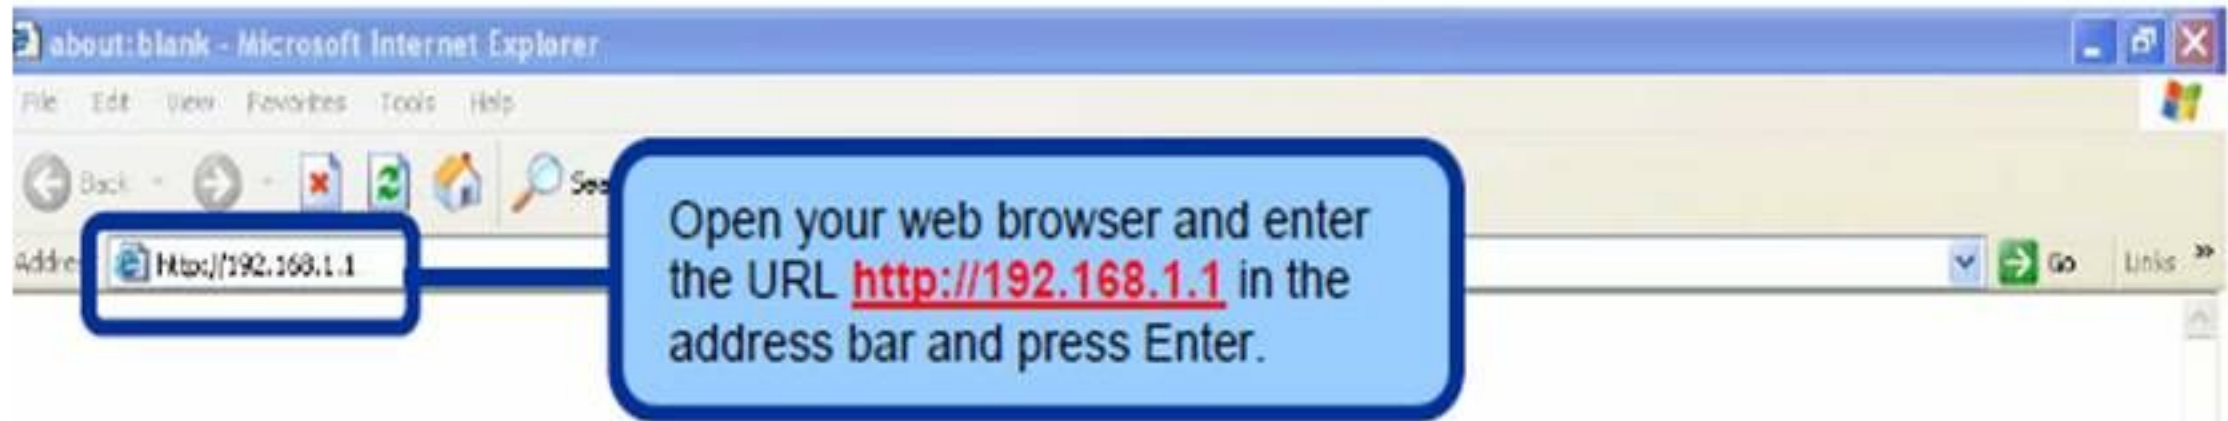

Click OK

LINKSYS[®] by Cisco

Firmware Version: V1.00

Wireless ADSL2+ Gateway WAG54G2

Setup

Setup

Wireless

Security

Access Restrictions

Applications & Gaming

Administration

Status

Basic Setup | DDNS | MAC Address Clone | Advanced Routing

Network Setup (WAN)

Internet Connection Type

VC Settings

Encapsulation: RFC 2516 PPPoE
Multiplexing: Bridged Mode Only
QoS Type: RFC 1483 Bridged
PCR: RFC 1483 Routed
SCR: RFC 2516 PPPoE
Autodetect: Enable Disable
Virtual Circuit: 0 VPI (Range 0-255)
38 VCI (Range 0-65535)
DSL Modulation: MultMode

PPPoE Settings

User Name:
Password:
 Connect on Demand - Max Idle Time: 5 minutes
 Keep Alive - Redial Period: 30 seconds

Optional Settings (required by some ISPs)

Host Name: WAG54G2
Domain Name:
MTU: Auto
Size: 1500

Network Setup (LAN)

Gateway IP

Local IP Address: 1.92 1.68 1 1

Help...

Setup

Setup

Wireless

Security

Access Restrictions

Applications & Gaming

Basic Setup

DDNS

MAC Address Clone

Advanced Routing

Network Setup (WAN)

Internet Connection Type

VC Settings

Encapsulation:

RFC 2516 PPPoE

Multiplexing:

LLC VC

QoS Type:

UBR

PCR:

cps

SCR:

cps

Autodetect:

Enable Disable

Virtual Circuit:

0 VPI (Range 0-255)

33 VCI (Range 0-65535)

DSL Modulation:

Multimode

User Name:

Password:

Connect on Demand - Max Idle Time: 5 minutes

Keep Alive - Redial Period: 30 seconds

Host Name:

WAG54G2

Domain Name:

MTU:

Auto

Size:

1500

Autodetect را Disable نماید.

Virtual Circuit را از 35 به 33 تغییر دهید.

Optional Settings (required by some ISPs)

Network Setup (LAN)

Setup

Setup

Wireless

Security

Access
Restrictions

Applications &
Gaming

Basic Setup

DDNS

MAC Address Clone

Advanced Routing

Network Setup (WAN)

Internet Connection Type

VC Settings

Encapsulation: RFC 2516 PPPoE

Multiplexing: LLC VC

QoS Type: UBR

PCR: cps

SCR: cps

Autodetect: Enable Disable

Virtual Circuit: 0 VPI (Range 0-255)

33 VCI (Range 0-65535)

DSL Modulation: MultiMode

PPPoE Settings

User Name:

Password:

Connect on Demand - Max Idle Time: 5 minutes

Keep Alive - Redial Period: 30 seconds

Optional Settings (required by some ISPs)

Host Name: WAG54G2

Domain Name:

MTU: Auto

Username و Password را که از طرف شرکت به شما داده می شود در این قسمت وارد نمایید.



Network Setup (WAN)

Internet Connection Type

VC Settings

Encapsulation: RFC 2516 PPPoE

Multiplexing: LLC VCI

QoS Type: UBR

PCR: [] cps

SCR: [] cps

Autodetect: Enable Cable

Virtual Circuit: [0] VPI (Range 0-255)
[30] VCI (Range 0-65535)

DSL Modulation: MultiMode

PPPoE Settings

User Name: []

Password: []

Connect on Demand - Max Idle Time: [5] minutes

Keep Alive - Refresh Period: [30] seconds

Optional Settings (required by some ISPs)

Host Name: WAG54G2

Domain Name: []

MTU: Auto

Size: 1500

Network Setup (LAN)

Gateway IP

Local IP Address: 192.168.1.1

Subnet Mask: 255.255.255.0

Network Address Server Settings (DHCP)

DHCP Server: Enable Disable DHCP Relay

DHCP Relay Server IP: [] [] [] []

Starting IP Address: 192.168.1.100

Maximum Number of DHCP Users: 50

Client Lease Time: [0] minutes (0 means one day)

Static DNS 1: [] [] [] []

Static DNS 2: [] [] [] []

Static DNS 3: [] [] [] []

WINS: [] [] [] []

Time Settings


Time Zone: (GMT) Greenwich Mean Time Dublin, Edinburgh Lisbon, London

Automatically adjust clock for daylight saving time

Language: English

Save Settings Cancel Changes

در پایین صفحه Save Setting را کلیک نمایید.

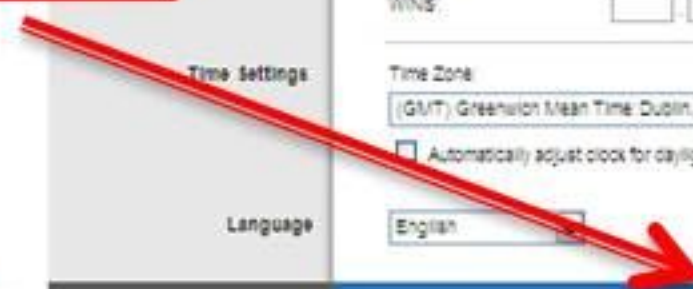

تغییر password وایرلس

Wireless را از منوی بالای صفحه انتخاب نمایید.

LINKSYS by Cisco Firmware Version: V1.00.10

Wireless ADSL2+ Gateway WAG54G2

Setup | **Setup** | **Wireless** | Security | Access Restrictions | Applications & Gaming | Administration | Status

[Basic Setup](#) | [DNS](#) | [MAC Address Clone](#) | [Advanced Routing](#)

Network Setup (WAN)

Internet Connection Type

VC Settings

Encapsulation: RFC 2516 PPPoE

Multiplexing: LLC VC

QoS Type: UBR

PCR: cps

SCR: cps

Autodetect: Enable Disable

Virtual Circuit: VPI (Range 0-255)

VCI (Range 0-85535)

DSL Modulation: MutMode

PPPoE Settings

User Name:

Password:

Connect on Demand - Max Idle Time: minutes

Keep Alive - Redial Period: seconds

Optional Settings (required by some ISPs)

Host Name:

Domain Name:

MTU:

Size:

Network Setup (LAN)

Gateway IP

Local IP Address:

Subnet Mask:

Network Address Server Settings (DHCP)

DHCP Server: Enable Disable DHCP Relay

DHCP Relay Server IP:

[Help...](#)

Wireless

Setup

Wireless

Security

Access
Restrictions

Applications &
Gaming

Administration

Status

Basic Wireless Settings

Wireless Security

Wireless MAC Filter

Advanced Wireless Settings

Basic Wireless Settings

Wireless Configuration:



Manual



Wi-Fi Protected Setup

Network Mode:

Mixed



Network Name (SSID):

linksys

Wireless Channel:

11 - 2.462 GHz



SSID Broadcast:



Enable



Disable

Help...



1

نام وایرلس خود را انتخاب نموده و در این قسمت تایپ نمایید.

Save Settings

Cancel Changes

2

در پایین صفحه Save Setting را کلیک نمایید.

Wireless Security را کلیک نمایید.

LINKSYS® by Cisco Firmware Version: V1.00.10

Wireless ADSL2+ Gateway WAG54G2

Wireless | Setup | **Wireless Security** | Access Restrictions | Applications & Gaming | Administration | Status

Basic Wireless Settings | **Wireless Security** | Wireless MAC Filter | Advanced Wireless Settings

Basic Wireless Settings

Wireless Configuration: Manual Wi-Fi Protected Setup


Network Mode: Mixed ▼

Network Name (SSID): linksys

Wireless Channel: 11 - 2.462 GHz ▼

SSID Broadcast: Enable Disable

Help...



Save Settings **Cancel Changes**

Wireless

Setup

Wireless

Security

Access
Restrictions

Applications &
Gaming

Administration

Status

Basic Wireless Settings

Wireless Security

Wireless MAC Filter

Advanced Wireless Settings

Wireless Security

Security Mode:

Disable

WEP

WPA-Personal

WPA2-Personal

WPA2-Mixed

WPA-Enterprise

WPA2-Enterprise

Disable

در WPA-Security Mode
Personal را انتخاب نمایید.

Help...

Save Settings

Cancel Changes



Wireless

Setup

Wireless

Security

Access
Restrictions

Applications &
Gaming

Administration

Status

Basic Wireless Settings | **Wireless Security** | Wireless MAC Filter | Advanced Wireless Settings

Wireless Security

1

Security Mode: WPA-Personal

Encryption: TKIP or AES

Pre-Shared Key: atG65gr5

Key Renewal: 3600 seconds

Help...



این قسمت وارد نمایید.
Password مورد نظر خود را در

Save Setting را کلیک

نمایید.

Save Settings

Cancel Changes